UNCLASSIFIED

AD NUMBER AD009072 CLASSIFICATION CHANGES TO: unclassified FROM: confidential LIMITATION CHANGES

TO:

Approved for public release; distribution is unlimited.

FROM:

Distribution authorized to U.S. Gov't. agencies and their contractors;

Administrative/Operational Use; APR 1953. Other requests shall be referred to Naval Proving Ground, Dahlgren, VA.

AUTHORITY

30 Apr 1965, DoDD 5200.10; USNSWC ltr, 14 May 1976

UNCLASSIFIED

A	N			
Л	V	-		

DEFENSE DOCUMENTATION CENTER

FOR

SCIENTIFIC AND TECHNICAL INFORMATION

CAMERON STATION ALEXANDRIA, VIRGINIA

DOWNGRADED AT 3 YEAR INTERVALS: DECLASSIFIED AFTER 12 YEARS DOD DIR 5200 10



UNCLASSIFIED

THIS REPORT HAS BEEN DECLASSIFIED AND CLEARED FOR PUBLIC RELEASE.

DISTRIBUTION A APPROVED FOR PUBLIC RELEASE; DISTRIBUTION UNLIMITED.



NPG REPORT NO. 1129

AAP Rod Warhead and Slotted Rocket Motor Assembly No. 366

PART A

SYNOPSIS

- 1. This test was conducted to determine the ability of 24 internal grooves 1/16" wide and 1/8" deep in the AAP rocket motor to produce rod-like fragments. The inert motor was assembled to a Composition C-3 loaded and fuzed AAP rod-producing warhead and the assembly was designated No. 366.
- 2. a. The internal grooves of the AAP mutor were of no significance in controlling fragment size.
- b. The AAP warhead with external grooves did not produce rodlike fragments of design lengths. The poor performance is attributed to the fuze booster location.

NPG REPORT NO. 1129

AAP Rod Warhead and Slotted Rocket Motor Assembly No. 366

TABLE OF CONTENTS

																									Page	
SYNOPSIS	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	1	
TABLE OF	CO	NT.	EN	TS	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	2	
AUTHORIT	Y.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	3	
REFERENCI	ES	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	3	
BACKGROU	ND	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	3	
OBJECT O	F T	ES!	T	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	3	
PERIOD O	F T	ES.	r	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	3	
DESCRIPT	ION	I 0:	F	IT	31v	τ	JNI	E	3	ES	ST	•	•	•	•	•	•	•	•	•	•	•	•	•	4	
PROCEDUR	E.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	4	
RESULTS .	AND) D	İŚ	CU	JS\$	BI (NC	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	4	
CONCLUSI	ons	.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•	•	•	•	•	5	
APPENDIX	A	-	AA	P	AS	S	एक	3L)	<i>t</i> 1	NO.	• .	366	5.	•	•	•	•	•	•	•1	FIC	נטנ	R IS	1		
APPENDIX	В	-	FR	AC	M	N.	r 1	IA8	SS	D	IS:	TR.	B	JT]	01	N.	•	•	•	•1	FI (GUI	RE	S 2	?=3 (In	ic1)
APPENDIX	C	_	DΤ	SI	۲.31	RI	וייד	r O I	V_	_	_		_		_	_		_		_	_	_	_	1	-2 (In	ic1)

NPG REPORT NO. 1129

AAP Rod Warhead and Slotted Rocket Motor Assembly No. 366

PART B

INTRODUCTION

AUTHORITY:

This test was authorized by references (a) and (b).

REFERENCES:

- NOL Conf Work Request WG/19/53 of 26 September 1952
- BUORD Conf ltr NP9-Rexb: JBC:teb Ser 29835 of 29 November 1951
- NPG Conf Report No. 948 of 27 March 1952
- d. NPG Conf Report No. 858 of 13 October 1951

BACKGROUND:

- a. Reference (b) authorized the Naval Ordnance Laboratory to work directly with the Naval Proving Ground in the development and testing of the Angled Arrow Projectile (AAP).
- b. References (c) and (d) reported the fragment mass distribution data of AAP assemblies having rod-producing warheads and unslotted motors. In an attempt to produce rod-like fragments from the motor, the Naval Ordnance Laboratory slotted the motor in AAP assembly No. 366 and forwarded it to the Naval Proving Ground for test.

4. OBJECT OF TEST:

This test was conducted to determine the ability of 24 internal grooves 1/16" wide and 1/8" deep in the AAP rocket motor to produce rod-like fragments. The inert motor was assembled to a Composition C-3 loaded and fuzed AAP rod-producing warhead and the assembly was designated No. 366.

5. PERIOD OF TEST:

- a. Date Project Letter b. Date Necessary Material Received
- c. Date Commenced Test
- d. Test Completed

- 26 September 1952
- 19 January 1953 6 March 1953
- 23 March 1953

NPG REPORT NO. 1129

AAP Rod Warhead and Slotted Rocket Motor Assembly No. 366

PART C

DETAILS OF TEST

6. DESCRIPTION OF ITEM UNDER TEST:

AAP Assembly No. 366 is shown in Figure 1. The warhead, 4"450 in diameter and 11"815 long, has 24 longitudinal grooves with depths of approximately half the wall thickness. The wall thickness tapers from 0"348 at the fuzed end to 0"260 at the motor joint end. The warhead was loaded with Composition C-3 and fuzed with an AAP fuze modified for static detonation. The warhead wall is thinner than those reported in references (c) and (d). The AAP rocket motor has 24 internal grooves 1/16" wide and 1/8" deep along its 10"12 length and a 0"375 thick wall. The weights of the assembly in pounds are as follows:

* Empty Warhead	Warhead <u>Filler</u>	Fuze	Inert <u>Motor</u>	<u>Total</u>
16.57	4.61	3.00	22.66	46.84

^{*} This warhead contained 6 fins. Those reported in references (c) and (d) did not have fins.

7. PROCEDURE:

The assembled AAP was detonated in the center of a sawdust filled chamber. After the detonation, the sawdust was sifted and the fragments recovered by the use of sieves and a magnetic separator. The warhead, fuze fin, and motor fragments were then separated and classified in weight groups.

8. RESULTS AND DISCUSSION:

a. The slotted warhead exhibited poor control of fragment size. Instead of the intended 24 rods, each 11.815 in length (totalling 283-1/2"), the warhead produced 37 rod-like fragments greater than 3" in length (totalling 190"), the longest one (1) being 8-1/2". The remaining 93-1/2" of fragment length consisted of fragments 3" and less in length. The warhead, head proper, fin, and fuze, fragments are shown in Figure 2. The break up of the design length is probably due to the fuze booster location. If the booster could be located closer to either end of the warhead, fragments of the approximate design length could be produced, reference (c).

CONFIDENTIAL SECURITY INFORMATION

NPG REPORT NO. 1129

AAP Rod Warhead and Slotted Rocket Motor Assembly No. 366

b. The AAP rocket motor fragmented fairly well considering the fact that the motor was inert. The internal grooves of the motor were of no significance in controlling fragment size. It is felt that an ungrooved motor would have performed similarly. The heavier ungrooved motor of AAP assembly 505-1, reference (c), fragmented into strips and clumps as did the motor in this test.

PART D

CONCLUSIONS

- 9. a. The internal grooves of the AAP motor were of no significance in controlling fragment size.
- b. The AAP warhead with external grooves did not produce rodlike fragments of design lengths. The poor performance is attributed to the fuze booster location.

NPG REPORT NO. 1129

AAP Rod Warhead and Slotted Rocket Motor Assembly No. 366

The tests upon which this report is based were conducted by:
V. PHILIPCPUK, Fragmentation Battery Officer
Fragmentation Division
Terminal Ballistics Department

This report was prepared by:

V. PHILIPCHUK, Fragmentation Battery Officer
Fragmentation Division
Terminal Ballistics Department

This test was reviewed by:
W. B. ROBERTSON, Lieutenant Commander, USN
Terminal Ballistics Officer
Terminal Ballistics Department
C. C. BRAMBLE, Director of Research, Ordnance Group

APPROVED: J. F. BYRNE
Captain, USN
Commander, Naval Proving Ground

E. A. RUCKNER
Captain, USN
Ordnance Officer
By direction

NPG REPORT NO. 1129

U. S. NAVAL PROVING GROUND DAHLGREN, VIRGINIA

Fifth Partial Report

on

Angled Arrow Projectile Program

Final Report

on


AAP Rod Warhead and Slotted Rocket Motor Assembly No. 366


Project No.: NOL-Re3f-614-1-53


Date: APR 30 1953

Copy No.: 11 No. of Pages: 6

CONFIDENTIAL SECURITY INFORMATION

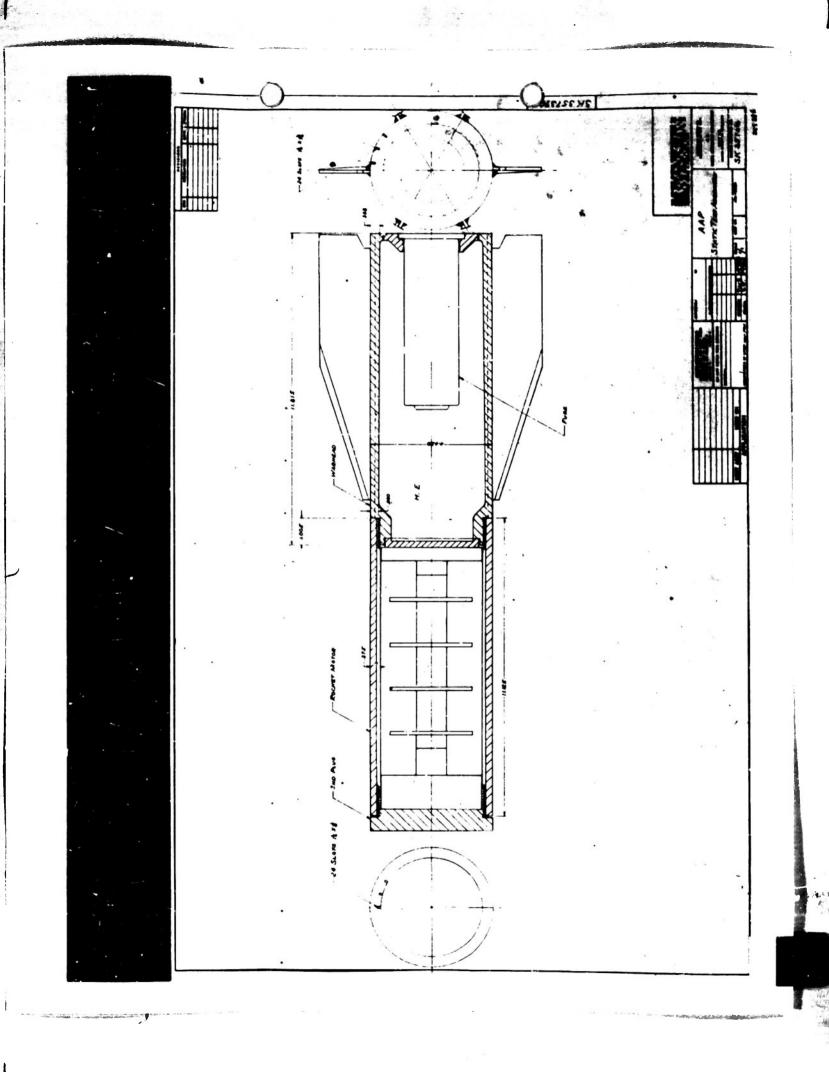

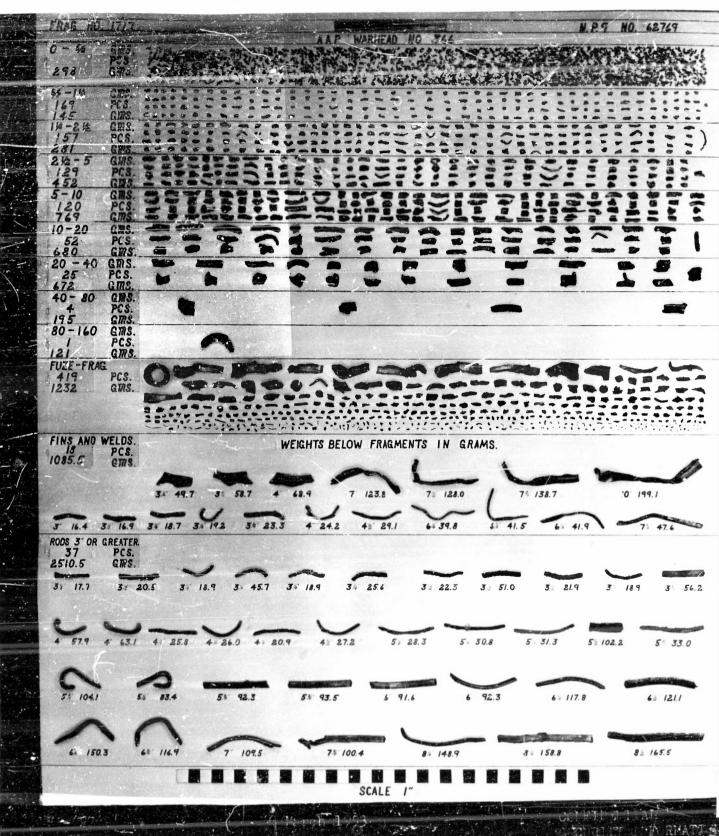

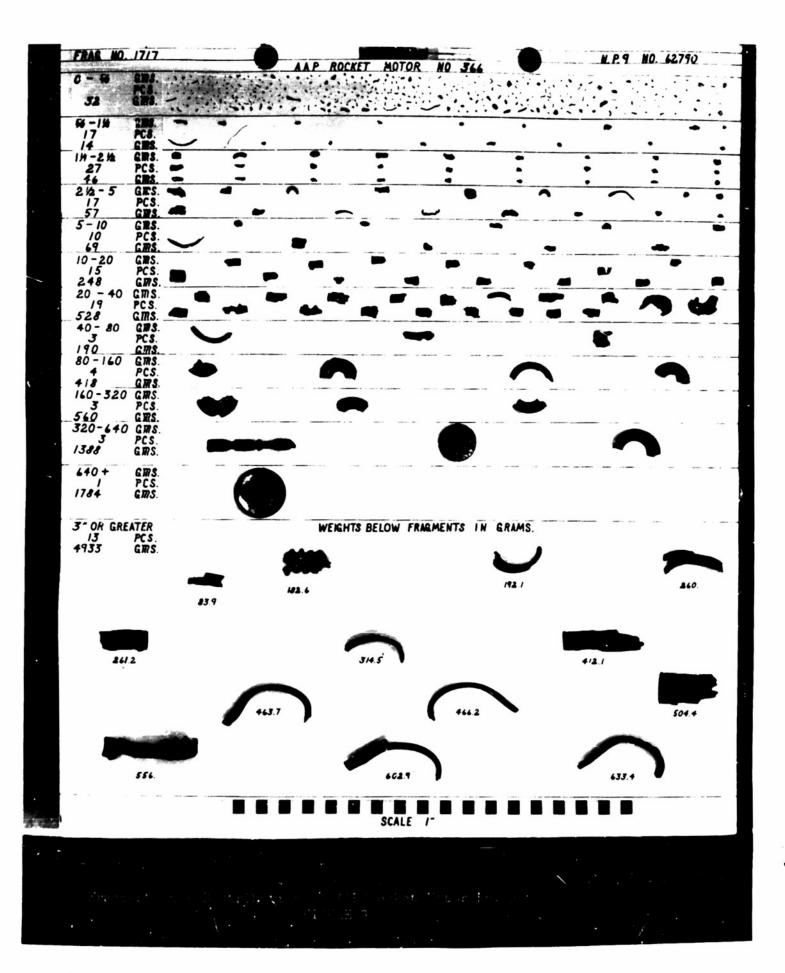

The state of the s

AAP Rod Warhead and Slotted Rocket Motor Assembly No. 366

DISTRIBUTION

Bureau of Ordnance:		
Ad3 Re2 Re3 Re3f		1 1 2 5
Director Armed Services Technical Inf Document Service Center Knott Building Dayton 2, Ohio	'ormation Agency	1
Navy Research Section Library of Congress Washington 25, D. C. (Via BUORD Re3f)		2
Commanding General Aberdeen Proving Ground Aberdeen, Maryland Attn: Technical Information Development and Proof		2
Commander, Operational Devel U. S. Atlantic Fleet, U. S. Norfolk 11, Virginia		1
Naval Ordnance Laboratory		1
Naval Ordnance Laboratory Attn: Explosives Division Attn: Mr. H. W. Semon		1 2
Picatinny Arsenal, Dover, N. Attn: Technical Division	J.	1
Reports Office APL/JHU, Silver Spring, Mary	rland	1
APL/JHU, Silver Spring, Md. Attn: Mr. H. S. Morton (Via INSORD, Silver Spring,	Md.)	1
CONFIDENTIAL SECURITY INFOLMATION	1	APPENDIX C

NPG REPORT NO. 1129

AAP Rod Warhead and Slotted Rocket Motor Assembly No. 366

DISTRIBUTION (Continued)

Pureau of Ordnance Technical Liaison Office Bell Telephone Laboratories Whippany, New Jersey	1
USNOTS, Inyokern, China Lake, Calif.	1
Inst. for Cooperative Research JHU/1315 St. Paul St. Via: (District Chief, Phila. Ord District 1500 Chestnut St., Phila. 2, Pa. Attn: Mr. Edward R. C. Niles)	1
Boeing Airplane Company Seattle Division Seattle, Washington	1
Commanding Officer Frankford Arsenal	1
Local:	
OT OTZ File	1 1 1